


BIKEMATE




UrbanX BMT01
Helmet Intercom
User Manual

Thank you for choosing BIKEMATE product. Please read this manual carefully before use and follow all instructions mentioned herein.

8. Phone Control

Disconnect the bluetooth then double click the – button to switch between Manual Answer Mode and Automatic Answer Mode.

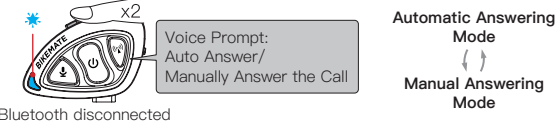

8.1 Automatic Answering Mode

Connect the phone and enter the Automatic Answer Mode, the call will be automatically picked up after 10s. Short press the On/Off button to end the call.

Long press the Voice Assistant Activate button for 2s to reject the phone.



8.2 Manual Answering Mode

Connect the phone and enter the Manual Answering Mode, short press the On/Off button to pick up/end the call.


Long press the Voice Assistant Activate button for 2s to reject the call.




Caring For Your BIKEMATE Product

- Please keep the product in a dry, clean, dust-free environment.
- Keep corrosive chemicals, liquids, and heat sources away from the product to prevent mechanical damage.
- Use only a soft and dry cloth for cleaning the product.
- Malfunction may be caused by dropping, the impact of external force.
- Do not attempt to disassemble the product. Doing so voids the warranty.
- Please have the product checked or repaired by authorized technicians if any malfunctions happen.
- Failure to follow all the instructions may result in mechanical damage.
- Warranty does not apply to human errors.

Packing List

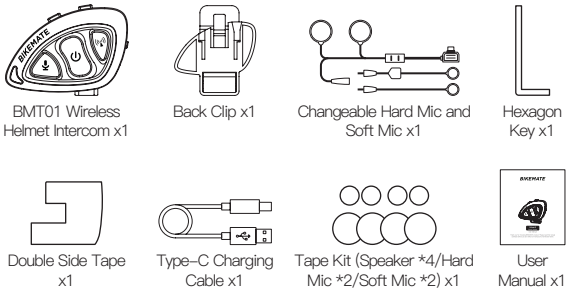

Product Instruction

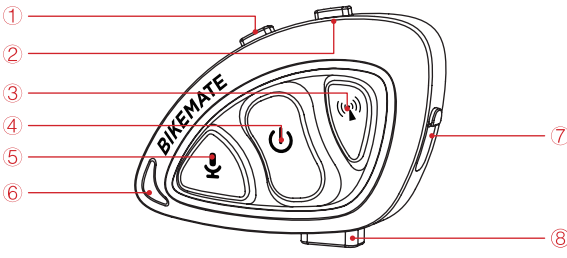

- | | |
|-------------------|-----------------------------------|
| ① Volume – Button | ⑤ Voice Assistant Activate Button |
| ② Volume + Button | ⑥ Indicator |
| ③ Intercom Button | ⑦ Charging Port |
| ④ On/Off Button | ⑧ Speaker/Microphone Interface |

* Important Notice:


Before installing the headsets, follow the Quick Manual instructions to connect your phone and audition the sound and volume. If there is a large difference in sound effect and volume after installing it on the helmet, please adjust the position of the speaker in the helmet.

Operation

1. Power On/Off

① Power On

Long press the On/Off Button for 3s.



② Power Off


Long press the On/Off Button for 3s.




* Automatically turn off when not in use for 10 minutes.

2. Phone Pairing

- ① For the first-time use, power it on and wait for the Blue Light flashing to enter the Bluetooth Mode automatically.
- ② Enable Bluetooth on your phone and connect the device "BMT01".

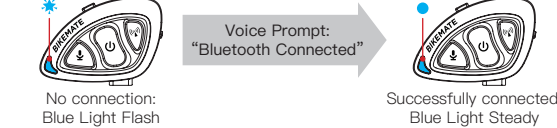

- ③ To connect the second phone, simultaneously press the On/Off Button and Volume + Button. Wait for the Blue Light to flash and enter Bluetooth mode, then select the "BMT01" device on the additional phone.

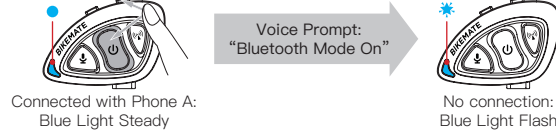

- * Will automatically reconnect to the phone once power on.
- * Can connect to 2 phones simultaneously.


3. Intercom Pairing

3.1 Intercom Pairing

- ① Short press the intercom button on only one BMT01 to search for nearby BMT01.
- ② Wait for the Blue & Red Light flashing fast to start the intercom pairing.

Note: Do not press two units simultaneously. Press one unit at a time.


- * Short press the intercom button again when pairing failed and wait for pairing completed.

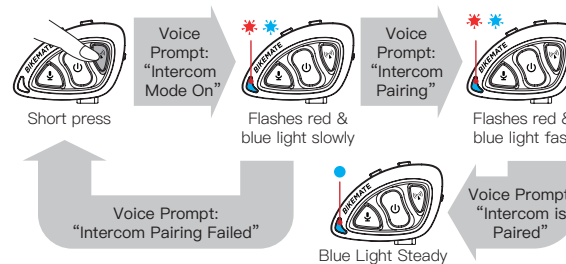

- * Long press the intercom button for 3s to exit the intercom mode.
- * If disconnected due to distance or signal interference, it will search the intercom nearby and auto-reconnect.
- * Will automatically reconnect with the paired device when powered on.

3.2 Intercom Unpairing



Exit the Intercom Mode, then double press the intercom button for unpairing.

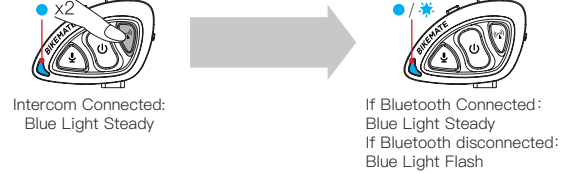

4. Music Sharing


- ① After completing the intercom pairing, double press the Voice Assistant Activate Button to enter Music Sharing Mode.
- ② Wait for the Blue & Red Light flashing fast to start the music sharing pairing.

* If no connection for 5mins, the pairing has failed. The device will automatically switch to intercom mode.

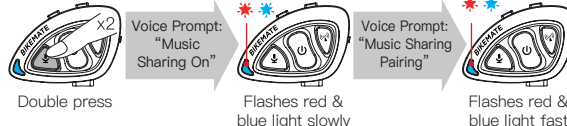

5. Switch between Intercom Mode and Music Sharing Mode

- ① Short press the intercom mode button to exit the music sharing mode and switch to intercom mode.
- ② Double press the Voice Assistant Activate button to exit the intercom mode and switch to music sharing mode.
- ③ Will automatically switch to intercom mode when music sharing connection failed.




6. Activate Voice Assistant

Short press the Voice Assistant Activate button to activate the voice assistant.



7. Language Settings

Disconnect the Bluetooth then double press the + button to switch the language: Thai/English.

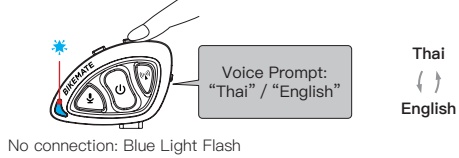

Instruction Warning

NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.

- (1) this device may not cause harmful interference. and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

10. Reset

Long press the on/off button and – button simultaneously for 8s for factory reset, the pairing memory will be deleted. The Blue & Red Light will flash simultaneously when resetting, after the reset, the device will turn off.




11. Charge

Red Light flash and voice prompt "low battery, please charge" when battery low, please charge via Type-C charging cable.

Red Light on when charging.

Light off when fully charged.

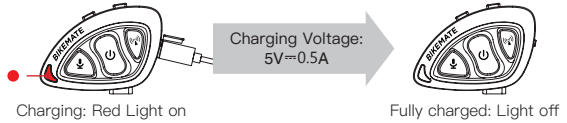


Installation and Removal

1. Method 1:

Installation:


- ① Loosen the screws on the back clip and separate the two parts.
- ② Stick the provided tape near the lower edge of your helmet, then attach the inner part of the back clip on the tape.
- ③ Slide the headset into the back clip slot and lock it firmly in place.
- ④ Open the liner at the ear position and clean the EPS (Expanded Polystyrene) surface of the helmet, then stick the provided tape on both the left and right sides of the helmet.
- ⑤ Attach the speaker on the fixed tape surface, and the speaker with the shorter cable should be placed close to the headset. Fix the microphone in place and arrange the helmet lining and cable.
- ⑥ Insert the headset cable into the headset's jack, and secure the headset cable neatly inside the helmet.

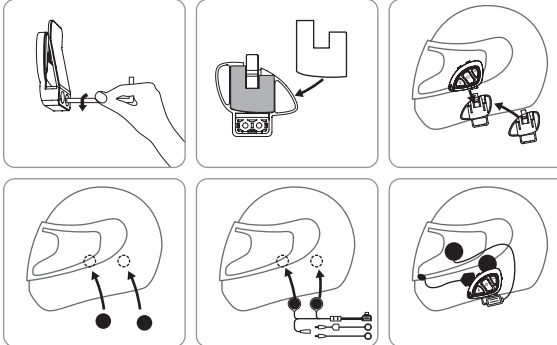

Removal:

- ① Unplug the cable from the headset.
- ② Press the inside buckle of the middle on the clip with one finger.
- ③ Slide the headset from the back clip.


Please refer to the description above for the installation of speakers.

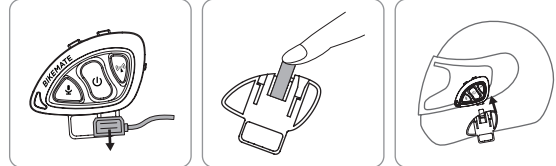

2. Method 2:

Installation:


- ① Slide the back clip from the lower edge of the helmet and secure it in place.
- ② Slide the headset into the back clip slot and lock it firmly.

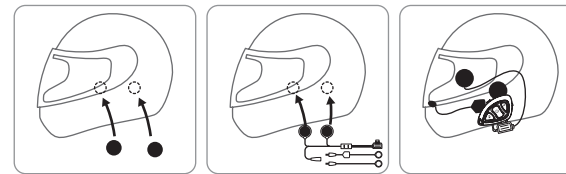

Removal:

- ① Unplug the cable from the headset.
- ② Press the inside buckle of the middle on the clip with one finger.
- ③ Slide the headset from the back clip.

Please refer to the description above for the installation of speakers.

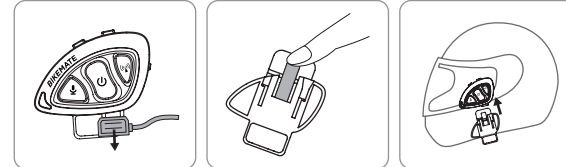


Specifications

Connection Distance with Mobile	10m
Wireless Version	5.3
Wireless Protocol	A2DP, AVRCP
Charging Port	Type-C
Battery	1000mAh
Charging Time	1.5H
Charging Voltage	5V
Speaker Diameter	40mm
Frequency Range	2.4GHZ
Temperature Range	-20~50°C

Product by Comforta

www.asia.bike/bikemate
@asiabike

BIKEMATE




UrbanX
อินเตอร์คอมติดหมวกกันน็อค

ขอคุณที่เลือกใช้ผลิตภัณฑ์ของ BIKEMATE
กรุณาอ่านคู่มืออย่างละเอียดก่อนการใช้งาน
และปฏิบัติตามคำแนะนำทั้งหมดที่ระบุไว้ในเอกสารนี้อย่างเคร่งครัด

การดูแลรักษาผลิตภัณฑ์ BIKEMATE ของคุณ


- กรุณาเก็บผลิตภัณฑ์ไว้ในที่แห้ง สะอาด และปราศจากฝุ่น
- หลีกเลี่ยงการวางผลิตภัณฑ์ใกล้สารเคมีของกัดกร่อน ของเหลว และแหล่งความร้อน เพื่อป้องกันความเสียหายทางกลไก
- ใช้ผ้านุ่มและแห้งเท่านั้นในการทำความสะอาดผลิตภัณฑ์
- ความเสียหายอาจเกิดจากการกระแทกหรือแรงกระทำจากภายนอก
- ห้ามถอดแยกชิ้นส่วนผลิตภัณฑ์เอง เพราะจะทำให้การรับประกันเป็นโมฆะ
- หากเกิดความขัดข้อง กรุณาให้นำผลิตภัณฑ์ไปตรวจสอบหรือซ่อมแซมโดยช่างเทคนิคที่ได้รับอนุญาตเท่านั้น
- หากไม่ปฏิบัติตามคำแนะนำทั้งหมด อาจทำให้เกิดความเสียหายกับตัวเครื่อง
- การรับประกันไม่ครอบคลุมความเสียหายที่เกิดจากความผิดพลาดของผู้ใช้งาน

รายการอุปกรณ์ในกล่อง

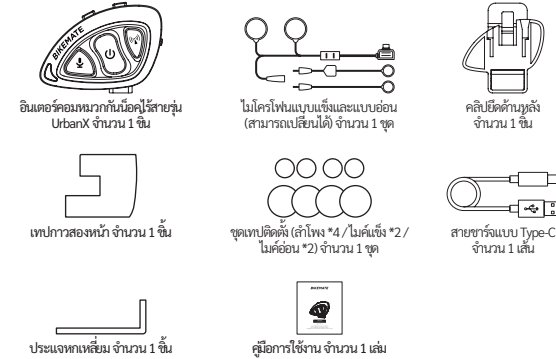

8. การควบคุมโทรศัพท์

สำหรับการเชื่อมต่อบลูทูธ จากนั้นดับเบิลคลิกที่ปุ่ม เพื่อสลับระหว่างโหมดตอบรับด้วยตนเอง และโหมดตอบรับอัตโนมัติ

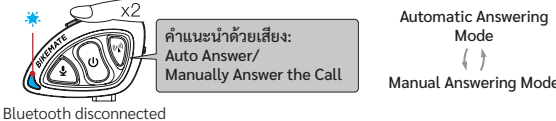

8.1 โหมดตอบรับอัตโนมัติ

เชื่อมต่อโทรศัพท์และเข้าสู่โหมดตอบรับอัตโนมัติ
สายจะถูกรับโดยอัตโนมัติหลังจาก 10 วินาที กดปุ่มเปิด/ปิดสวิตช์ เพื่อวางสาย
กดปุ่มเปิดใช้งานผู้ช่วยเสียงค้างไว้ 2 วินาทีเพื่อปฏิเสธสายโทรศัพท์




8.2 โหมดตอบรับด้วยตัวเอง

เชื่อมต่อโทรศัพท์และเข้าสู่โหมดตอบรับด้วยตนเอง กดปุ่มเปิด/ปิดสวิตช์ เพื่อรับ/วางสาย
กดปุ่มเปิดใช้งานผู้ช่วยเสียงค้างไว้ 2 วินาทีเพื่อปฏิเสธสาย



คำแนะนำในการใช้งานผลิตภัณฑ์

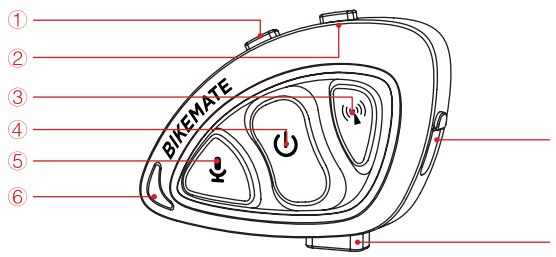

- | | | |
|-----------------------|-------------------------------|-------------------------------|
| 1 ปุ่มลดระดับเสียง | 4 ปุ่มเปิด/ปิดเครื่อง | 7 พอร์ตชาร์จ |
| 2 ปุ่มเพิ่มระดับเสียง | 5 ปุ่มเรียกใช้งานผู้ช่วยเสียง | 8 ช่องเชื่อมต่อลำโพง/ไมโครโฟน |
| 3 ปุ่มอินเตอร์คอม | 6 ไฟแสดงสถานะ | |

***หมายเหตุสำคัญ:**
ก่อนติดตั้งชุดหูฟัง กรุณาทำตามคำแนะนำในคู่มือแบบย่อเพื่อเชื่อมต่อโทรศัพท์และทดสอบคุณภาพเสียงและระดับความดัง
หากหลังจากติดตั้งในหมวกกันน็อคแล้วพบว่าระดับเสียงหรือคุณภาพเสียงแตกต่างจากเดิมมาก กรุณาปรับตำแหน่งของลำโพงภายในหมวกกันน็อคให้เหมาะสม


10. การตั้งค่าบลูทูธ

กดปุ่มเปิด/ปิด และปุ่ม + พร้อมกันค้างไว้ 8 วินาที เพื่อรีเซ็ตเป็นค่าเริ่มต้นจากโรงงาน
หน่วยความจำการจับคู่ถูกลบ
ไฟสีฟ้าและสีแดงจะกะพริบพร้อมกันเมื่อรีเซ็ต หลังจากการรีเซ็ตแล้ว อุปกรณ์จะปิด



11. การชาร์จไฟ

ไฟสีแดงจะกระพริบและเสียงแจ้งเตือน "แบตเตอรี่เหลือน้อย โปรดชาร์จ"
เมื่อแบตเตอรี่เหลือน้อย โปรดชาร์จผ่านสายชาร์จ Type-C
ไฟสีแดงติดเมื่อชาร์จ ไฟดับเมื่อชาร์จเต็ม

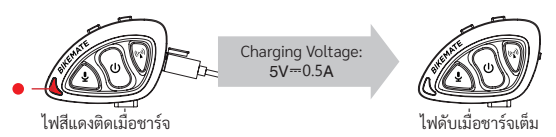

การใช้งาน


1. การเปิด/ปิดเครื่อง

กดปุ่ม เปิด/ปิดเครื่อง ค้างไว้เป็นเวลา 3 วินาที



2. การปิดเครื่อง


กดปุ่ม เปิด/ปิดเครื่อง ค้างไว้เป็นเวลา 3 วินาที

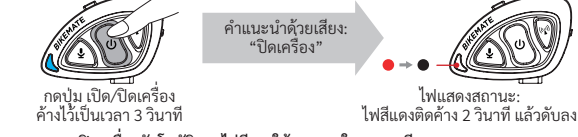

* ระบบจะปิดเครื่องอัตโนมัติหากไม่มีการใช้งานภายใน 10 นาที


2. การจับคู่อุปกรณ์กับโทรศัพท์

- 1 ในการใช้งานครั้งแรก ให้เปิดเครื่อง แล้วรอจนไฟสีน้ำเงินกะพริบเพื่อเข้าสู่โหมดบลูทูธโดยอัตโนมัติ
- 2 เปิดบลูทูธบนโทรศัพท์ของคุณ และเชื่อมต่ออุปกรณ์ชื่อ "BMT01"

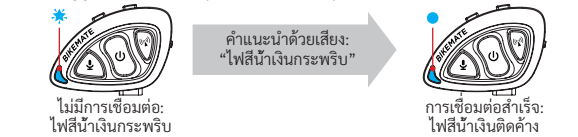

3. การเชื่อมต่อโทรศัพท์เครื่องที่สอง กดปุ่ม เปิด/ปิดเครื่อง และปุ่ม + พร้อมกันค้างไว้ 5 วินาที

พร้อมกัน ร้องกว่าไฟสีน้ำเงินจะกะพริบและเข้าสู่โหมดบลูทูธ จากนั้นเลือกอุปกรณ์ "BMT01" บนโทรศัพท์เครื่องที่สอง

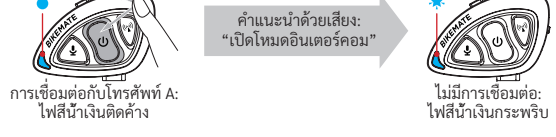

*ระบบจะเชื่อมต่อกับโทรศัพท์โดยอัตโนมัติเมื่อเปิดเครื่อง
*สามารถเชื่อมต่อกับโทรศัพท์ได้พร้อมกัน 2 เครื่อง

3. การจับคู่อินเตอร์คอม

3.1 การจับคู่อินเตอร์คอม


- 1 กดปุ่มอินเตอร์คอมของ BMT01 เพียงตัวเดียวเพื่อค้นหา BMT01 ใกล้เสียงหมายเหตุ: ห้ามกดสองเครื่องพร้อมกัน กดเพียงตัวเดียวในแต่ละครั้ง
- 2 รอจนกว่าไฟสีฟ้าและสีแดงจะกะพริบเร็ว เพื่อเริ่มการจับคู่อินเตอร์คอม

* หากการจับคู่อินเตอร์คอมล้มเหลว ให้กดปุ่มอินเตอร์คอมอีกครั้งแล้วรอจนกว่าการจับคู่จะสำเร็จ



การถอด:


- 1 ถอดสายเคเบิลออกจากชุดหูฟัง
- 2 กดตัวล็อกด้านในตรงกลางของคลิปด้วยนิ้วเดียว
- 3 เลื่อนชุดหูฟังออกจากคลิปด้านหลัง โปรดอ้างอิงคำอธิบายด้านบน สำหรับการติดตั้งลำโพง

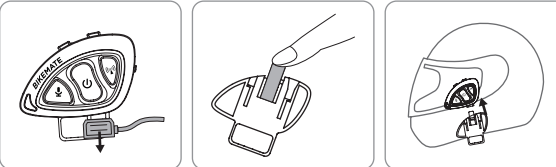

2. Method 2:

Installation:

- 1 เลือกคลิปหนีบด้านหลังจากขอบด้านล่างของหมวกกันน็อคและยึดให้เข้าที่
- 2 เลื่อนชุดหูฟังเข้าไปในช่องของคลิปหนีบด้านหลังและล็อกให้แน่น

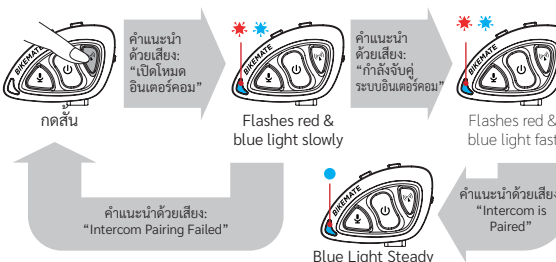


* กดปุ่มอินเตอร์คอมค้างไว้ 3 วินาทีเพื่อออกจากโหมดอินเตอร์คอม

* หากการเชื่อมต่อถูกตัดเนื่องจากระยะทางหรือสัญญาณรบกวน จะค้นหาอินเตอร์คอมที่อยู่ใกล้เคียงและเชื่อมต่อโหมดอัตโนมัติ

* จะเชื่อมต่อกับอุปกรณ์ที่จับคู่ไว้โดยอัตโนมัติเมื่อเปิดเครื่อง

3.2 การยกเลิกการจับคู่อินเตอร์คอม


ออกจากโหมดอินเตอร์คอม จากนั้นกดปุ่มอินเตอร์คอมสองครั้งเพื่อยกเลิกการจับคู่

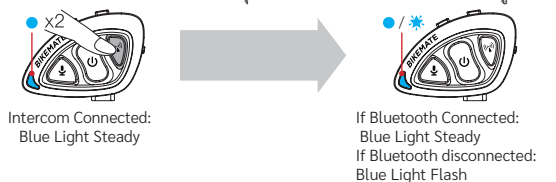

4. การแบ่งปันเพลง

- 1 หลังจากจับคู่อินเตอร์คอมเสร็จสิ้น กดปุ่มเปิดใช้งานผู้ช่วยเสียงสองครั้งเพื่อเข้าสู่โหมดแบ่งปันเพลง
- 2 รอให้ไฟสีฟ้าและสีแดงกะพริบเร็วๆ เพื่อเริ่มการจับคู่แบ่งปันเพลง

* หากไม่มีการเชื่อมต่อภายใน 5 นาที การจับคู่จะล้มเหลว อุปกรณ์จะเปลี่ยนเป็นโหมดอินเตอร์คอมโดยอัตโนมัติ



5. สลับระหว่างโหมดอินเตอร์คอมและโหมดแบ่งปันเพลง

- 1 กดปุ่มโหมดอินเตอร์คอมสั้น เพื่อออกจากโหมดแบ่งปันเพลงและสลับไปยังโหมดอินเตอร์คอม
- 2 กดปุ่มเปิดใช้งานผู้ช่วยเสียงสองครั้งเพื่อออกจากโหมดอินเตอร์คอมและสลับโหมดแบ่งปันเพลง
- 3 จะสลับไปยังโหมดอินเตอร์คอมโดยอัตโนมัติเมื่อมีการเชื่อมต่อการแบ่งปันเพลง




6. เปิดใช้งานผู้ช่วยเสียง

กดปุ่มเปิดใช้งานผู้ช่วยเสียงสั้น เพื่อเปิดใช้งานผู้ช่วยเสียง



7. การตั้งค่าภาษา

กดปุ่มเชื่อมต่อบลูทูธ จากนั้นกดปุ่ม + สองครั้งเพื่อสลับภาษา: ไทย/อังกฤษ

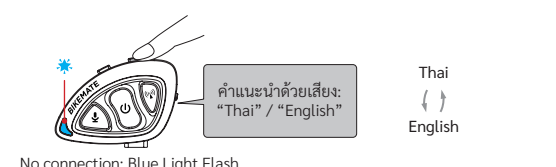

Specifications

Connection Distance with Mobile	10m
Wireless Version	5.3
Wireless Protocol	A2DP, AVRCP
Charging Port	Type-C
Battery	1000mAh
Charging Time	1.5H
Charging Voltage	5V
Speaker Diameter	40mm
Frequency Range	2.4GHZ
Temperature Range	-20~50°C

Product by Comforta

www.asia.bike/bikemate

@asiabike